

## FR13-60




### Technische Infos

Höhe (Dicke)	130mm
Breite	596mm
Länge	Wap. S350: 0,60m => 5,20m uit voorraad (per 10cm oplopend) Wap. S700: 5,30m uit voorraad
Feuerwiderstand	1 uur
Expositionsklasse	XC1
Transportgewicht	1,95 kN/m <sup>2</sup>
Gewicht /m	1,17 kN/m
Bemessungsgewicht	2,12 kN/m <sup>2</sup> (incl. voegvulling)
Hohlraumfüllung	5,54 l/m
Füllbeton	7 l/m <sup>2</sup>
Betongüte	C 40/50
Stahlqualität	f(pk)500; f(p0.1k) 550  vanaf 3,80 m

### Keurmerken



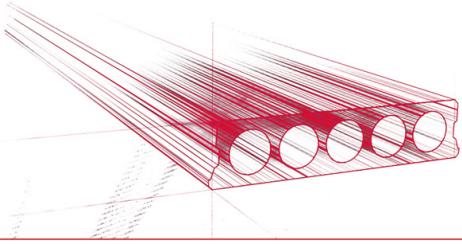

## Spannweiten


---

Zie hiervoor onze online rekenmodule




## Bohrvorschriften

---

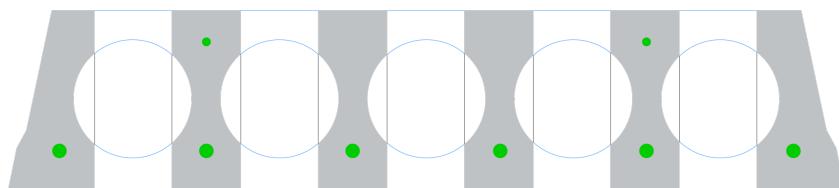


62	55	49	55	49	55	49	55	49	55	63
<hr/>										
596										



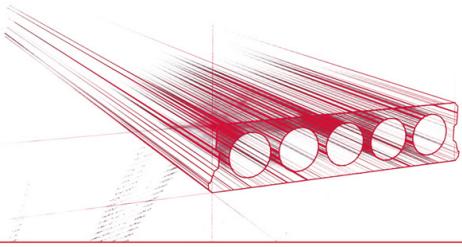

## Bewehrungspositionen

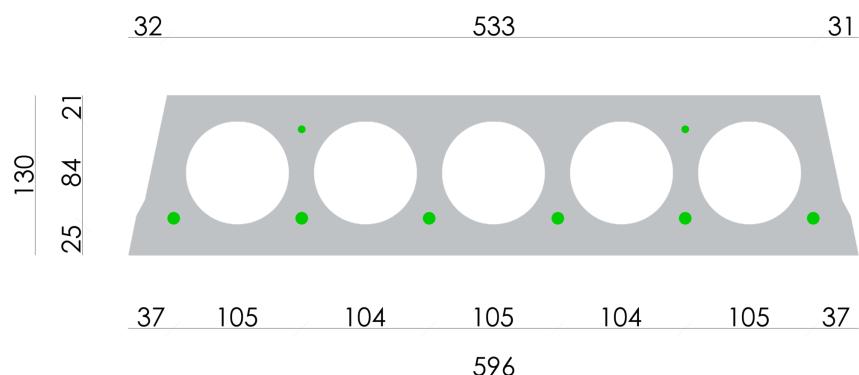



## Zubehör


---




Passplatten - Stahlbeton-Hohlplatte




Schrägschnitte




Ausstehende Bewehrung



Verjüngte Unterseite



Verjüngte Oberseite



Eckaussparungen



Kopfaussparung



Randaussparung




Ausnehmungen zur Plattenkopplung




Geöffnete Hohlkammern



Open kanalen met inhangwapening



Wechseleisen  
Stahlbeton-Hohlplatten

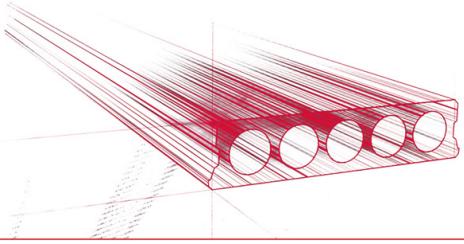

## Vorrat

	Produktion	Abnehmbar	Vorrätig
--	------------	-----------	----------

Malle 1			
Malle 2			
Frederickx	X	X	X
Tessenderlo			

