



FR13-60




Technische Infos

| | |
|-------------------|--|
| Höhe (Dicke) | 130mm |
| Breite | 596mm |
| Länge | Wap. S350: 0,60m => 5,20m uit voorraad (per 10cm olopend) Wap. S700: 5,30m uit voorraad |
| Feuerwiderstand | 1 uur |
| Expositionsklasse | XC1 |
| Transportgewicht | 1,95 kN/m ² |
| Gewicht /m | 1,17 kN/m |
| Bemessungsgewicht | 2,12 kN/m ² (incl. voegvulling) |
| Hohlraumfüllung | 5,54 l/m |
| Füllbeton | 7 l/m ² |
| Betongüte | C 40/50 |
| Stahlqualität | f(pk)500; f(p0.1k) 550 vanaf 3,80 m |

Keurmerken



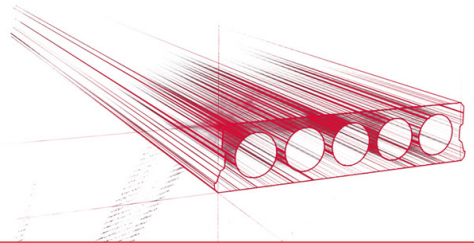


Spannweiten


Zie hiervoor onze online rekenmodule




Bohrvorschriften

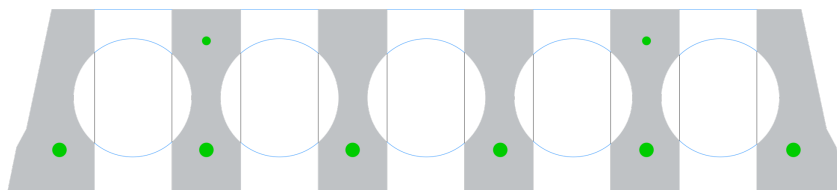

| | | | | | | | | | | |
|-----|----|----|----|----|----|----|----|----|----|----|
| 62 | 55 | 49 | 55 | 49 | 55 | 49 | 55 | 49 | 55 | 63 |
| 596 | | | | | | | | | | |

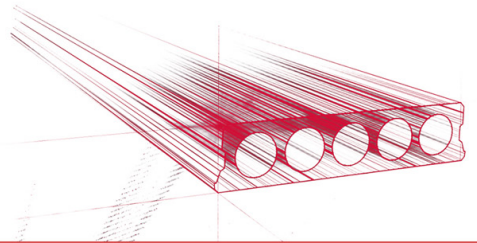


Bewehrungspositionen

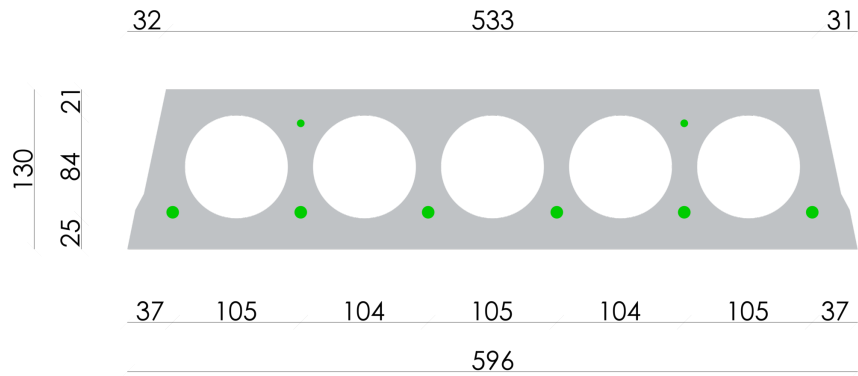





Zubehör




Passplatten - Stahlbeton-Hohlplatte




Schrägschnitte




Ausstehende Bewehrung




Verjüngte Unterseite




Verjüngte Oberseite




Eckaussparungen




Kopfaussparung




Randaussparung




Ausnehmungen zur Plattenkopplung



Geöffnete Hohlkammern



Open kanalen met inhangwapening



Wechseleisen Stahlbeton-Hohlplatten



Vorrat

| | Produktion | Abnehmbar | Vorrätig |
|-------------|------------|-----------|----------|
| Malle 1 | | | |
| Malle 2 | | | |
| Frederickx | X | X | X |
| Tessengerlo | | | |